



COMMERCIAL LAUNDRY SYSTEMS

TITAN-C




TITAN-C

Washer

		Non-Heater	
CYLINDER			
Drum Volume	cu.ft (l)	5.2 (147)	
Diameter	in. (mm)	24 (610.8)	
Depth	in. (mm)	20.4 (518.1)	
Capacity	lb (kg)	33 (15)	
DIMENSIONS			
Product (WxHxD)	in.(mm)	29 (737) x 40.8 (1,036) x 32 (814)	
With Door Opening	in.(mm)	53 (1,370)	
Carton (WxHxD)	in.(mm)	31 (788) x 44.3 (1,125) x 33.3 (846)	
Weight (Product/Carton)	lb (kg)	221.8 (100.6) / 248 (112.5)	
SPEED			
Wash	RPM	46	
Extract (High Speed)	RPM	980	
G-force	G	327	
ENERGY			
Electric Ratings	V/Hz/A	120/60/5	
WATER USAGE			
Water Consumption	gal (l)	17.8 (67.6)	
NOISE & CYCLE TIME			
Noise Level (Sound Power)	dB	Lower than 62	
Program Duration in Minutes (Default)	min	35	
SYSTEM & CONTROL			
Inverter Direct Drive Motor		O	
Intelligent Electronics Controls		O	
Heating System	W	1,000 (Only for Tub Clean)	
Compartment Dispenser		3 Compartment Dispenser	
Drain System		Gravity Drain	
Pricing Program		Special Vended Price	
Emergency Stop Button		O (OPL Only)	
Auto Dosing Interface		O	
Damper		4 Friction Fampner (ASK 80N)	
PROGRAMS			
Program List		Hot Warm Cold Delicates Add SuperWash (Card & OPL) / CUSTOM PGM (OPL)	
EXTERNAL FINISH			
Drum		Stainless Steel Drum	
Top Plate		Porcelain (Single)	
Transparent Glass Window Door		O	
Colors		Platinum	
Cabinet		Painted Steel	
Cabinet Cover		Painted Steel	
Control Panel		Painted Steel	
Panel Frame		Painted Steel	
Panel Frame Lower		Painted Steel	
Window Display		Silk Screen	
Window Display Sheet		Aluminum	
CIRCUIT PROTECTION			
PCB Fuse - Main Control Board	amps	12	
PCB Fuse - Filter Assembly	amps	15	

	Non-Heater		
	Coin	Card	OPL
Single	F10C7FD4	F10C7FD7	F10C7FD3
Stack	-	-	-

- * Dimensions and weights are approximate.
- * Design, features and specifications subject to change without notice.
- * Some models may not be available for sales in certain countries.
- * Model name can be varied by countries.

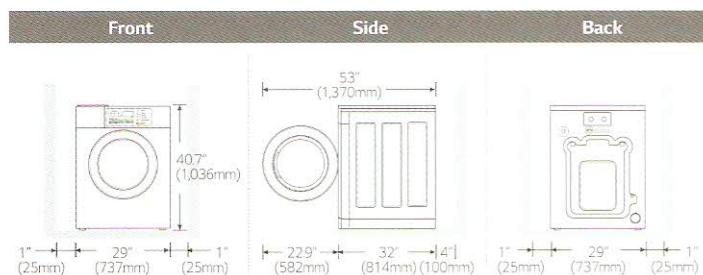

Dryer

		Gas	
CYLINDER			
Drum Volume	cu.ft (l)	9.0 (254)	
Diameter	in.(mm)	28.2 (716)	
Depth	in.(mm)	24.2 (614)	
Capacity	lb (kg)	30 (13.6)	
DIMENSIONS			
Product (WxHxD)	in. (mm)	29 (737) x 40.2 (1,022) x 42.9 (1,090)	
With Door Opening	in. (mm)	65.1 (1,655)	
Carton (WxHxD)	in. (mm)	30.7 (781) x 44.7 (1,137) x 44.4 (1,128)	
Weight (Product/Carton)	lb (kg)	220 (100) / 240 (108.8)	
OPERATION			
Electric Requirements	V/Hz/amps	120/60/10	
Heating Type		Gas	
Type of Drying	W	Ventilation	
Air Flow	CFM	350	
Drum Motor	KW	0.5 (120V/60Hz)	
Fan Motor	KW	0.3	
Gas Ratings	KW/BTU	16.1 (EU) ¹⁾ /55,000	
CONNECTIONS			
Air Outlet Diameter	in.(mm)	6 (154)	
Exhaust Airflow Diameter	in.(mm)	6 (154)	
SYSTEM & CONTROL			
Pricing Program		Special Vended Price	
Intelligent Electronic Controls		O	
PROGRAMS			
Program List		High Temp Med Temp Low Temp No Heat	
EXTERNAL FINISH			
Top Plate		Porcelain (Single) / Painted Steel (Stack)	
Transparent Glass Window Door		O	
Colors		Platinum	
Cabinet		Painted Steel	
Control Panel		Painted Steel	
Window Display		Silk Screen	
Window		Aluminium	

	Gas	
	Coin	Card / OPL
Single	RN1870AN4	RN1870AH4
Stack	RN1870AN2	RN1870AH2

- * Dimensions and weights are approximate.
- * Design, features and specifications subject to change without notice.
- * Some models may not be available for sales in certain countries.
- * Model name can be varied by countries.
- * Titan-C Dryer is stacked in the factory.
- 1) Gas rating is different by countries.

